



Angle Quick-Closing Valve(Fig.03.02)


Used as a remote-controlled closing valve in fuel lines. Available in wire-operated, pneumatic and hydraulic models.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+180°C
- Connection Standard: Design accordance with TS EN 1092-1/1092-2/1092-3
- Dimension Standard: Design accordance with TS EN 558 Series -8
- Class Approved (TL,BV,RMRS,RINA)

*DN 15 / 20 / 25 / 32 : SMALL PISTON *DN 40 / 50 / 65 / 80 / 100 / 125 / 150 / 200 : LARGE PISTON

PRODUCT SPECIFICATIONS

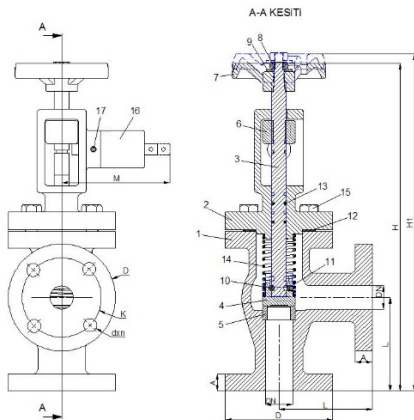

ITEM	Part Name	Material
1	BODY	GGG 40.3 / GSC 25 / AISI 316 / GG 25 / RG 5 / RG 10
2	COVER	GGG 40.3 / GSC 25 / AISI 316 / GG 25 / RG 5 / RG 10
3	SHAFT	X5CrNi 189
4	DISC	X5CrNi 189
5	BUSH	X5CrNi 189
6	BILLET	RG 5(CuSn5)
7	HANDWHEEL	GG 25
8	WASHER	S355JR
9	NUT	S355JR
10	BALL	AISI 304 / AISI 316
11	SETSCREW	AISI 304
12	GASKET	KLINGRIT(NON ASBESTOS)
13	O-RING	NBR-VITON
14	SPRING	DUBLEX(1.4462)
15	NUT	S355JR
16	PISTON	MS58
17	SETSCREW	AISI 304

DN	15	20	25	32	40	50	65	80	100	125	150	200
D	95	105	115	140	150	165	185	200	220	250	285	340
K	65	75	85	100	110	125	145	160	180	210	240	295
A	16	18	18	18	18	18	18	20	20	22	22	24
dxn	14x4	14x4	14x4	18x4	18x4	18x4	18x4	18x8	18x8	18x8	22x8	22x12
L	90	95	100	105	115	125	145	155	175	200	225	275
M	110	110	110	110	115	120	120	132	132	150	150	153
H	340	340	350	358	365	400	420	450	485	530	585	645
H1	350	350	360	370	380	417	440	475	515	560	615	675
Weight (Kg)	11.00	11.20	11.60	15.50	16.00	19.20	23.60	32.60	40.60	45.00	65.00	110.00