



Quick-Opening Valve(Fig.03.33)


Used in hot and cold water systems, thermal oil systems, steam systems and all non-acidic, non-alkaline fluid systems.



PRODUCT DETAILS

- Safe Operating Temperature: -10/+240°C
- Connection Standard: Design accordance with TS EN 1092-1/1092-2/1092-3
- Dimension Standard: Design accordance with TS EN 558 Series -1

PRODUCT SPECIFICATIONS

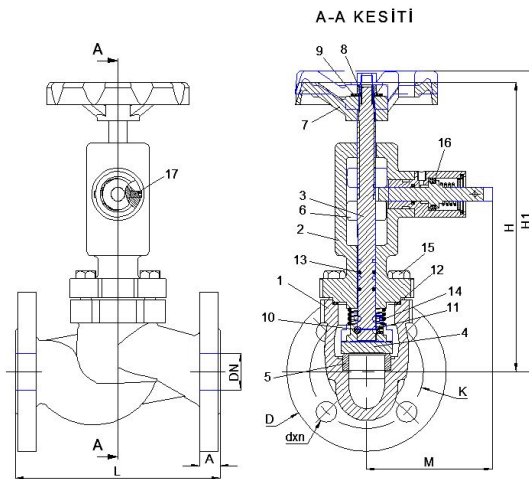

ITEM	Part Name	Material
1	BODY	GGG 40.3 / GSC 25 / AISI 316 /RG 5 /RG 10
2	COVER	GGG 40.3 / GSC 25 / AISI 316 /RG 5 /RG 10
3	SHAFT	X5 CrNi 189
4	DISC	X5 CrNi 189
5	BUSH	X5 CrNi 189
6	BILLET	RG5(CuSn5)
7	HANDWHEEL	GG 25
8	NUT	S355JR
9	WASHER	S355JR
10	BALL	AISI 304
11	SETSCREW	AISI 304
12	GASKET	KLINGRIT(NON ASBESTOS)
13	O-RING	NBR / VITON
14	SPRING	DUBLEX(1.4462)
15	BOLT	S355JR
16	PISTON	MS 58(CuZn40Pb2)
17	SETSCREW	AISI 304

DN	15	20	25	32	40	50	65	80	100
D	95	105	115	140	150	165	185	200	220
K	65	75	85	100	110	125	145	160	180
A	16	18	18	18	18	18	18	20	20
dxn	14x4	14x4	14x4	18x4	18x4	18x4	18x4	18x8	18x8
L	130	150	160	180	200	230	290	310	350
H	277	287	292	320	351	362	382	430	455
H1	285	297	304	333	362	382	402	455	485
Weight (Kg)	6.15	7.1	8.00	10.55	12.55	15.30	21.15	26.50	42.65