



Straight Fire Valve(Fig.03.10)




Used to take outlets from fire lines. The inlet connection is flanged and the outlet has a coupling. On request, the coupling can be supplied as German, Italian or Japanese type.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+120°C
- Connection Standard: Can be drilled according to TS EN 1092-3 / JIS B2239 / ANSI 150LB
- Material Standard: TS EN 1982

PRODUCT SPECIFICATIONS

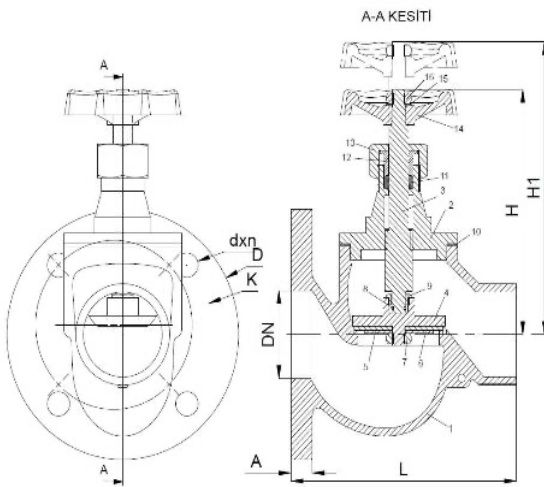

ITEM	Part Name	Material
1	BODY	RG5(CuSn5) / RG10(CuSn10)
2	COVER	RG5(CuSn5) / RG10(CuSn10)
3	SHAFT	MS58
4	DISC	MS58
5	GASKET	KLINGRIT(NON ASBESTOS)
6	DISC WASHER	MS58
7	NUT	AISI 316 / AISI 304
8	STOPPER	AISI 304
9	EDITION NUT	MS58
10	GASKET	KLINGRIT(NON ASBESTOS)
11	PACKING	PTFE
12	EDITION PACKING	MS58
13	EDITION NUT	MS58
14	HANDWHEEL	Aluminium(Etial 160)
15	WASHER	AISI 304
16	NUT	AISI 304

DN	D				K				A	dxn				H	H1	L	Weight (Kg)
	TS EN 1092-1	JIS B 2220		ANSI	TS EN 1092-1	JIS B 2220		ANSI	-	TS EN 1092-1	JIS B 2220		ANSI	-	-	-	-
	PN 10/16	JIS 5K	JIS 10K	150LB	PN 10/16	JIS 5K	JIS 10K	150LB	-	PN 10/16	JIS 5K	JIS 10K	150LB	-	-	-	-
40	150	120	140	127	110	95	105	98.6	16	18x4	15x4	19x4	15.8x4	225	240	140	4.80
50	165	130	155	152.5	125	105	120	120.7	17	18x4	15x4	19x4	19.10x4	242	262	155	6.80
65	185	155	175	178	145	130	140	139.7	17	18x4	15x4	19x4	19.10x4	282	307	180	9.5