




Single Drain Valve with Lever(Fig.03.15)

Used for draining fuel oil, diesel oil and lube oil tanks.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+120°C
- Material Standard: TS EN 1982 / TS 526 EN 1563
- Connection Standard: TS EN 1092-1 (DIN 2501) / TS EN 1092-2 / 1092-3

PRODUCT SPECIFICATIONS

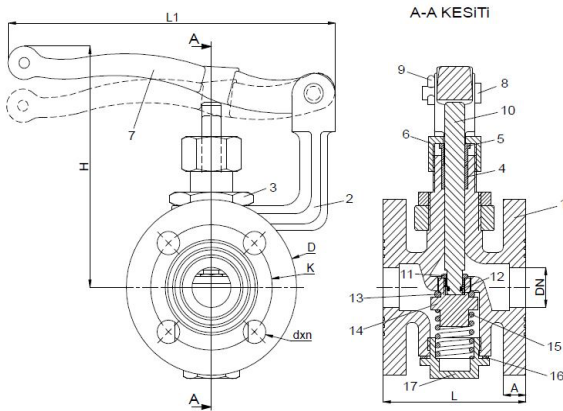

ITEM	Part Name	Material
1	BODY	GGG 40.3 / RG5(CuSn5) / RG10(CuSn10)
2	FIXED HANDLE	GGG 40.3 / RG5(CuSn5) / RG10(CuSn10)
3	COVER NUT	MS 58
4	PACKING	PTFE
5	PACKING EDITION	MS 58
6	EDITION NUT	MS 58
7	HANDLE	RG5(CuSn5) / RG10(CuSn10)
8	PIN	MS 58
9	PIN	S235JR
10	SHAFT	MS 58
11	UNION NUT	MS 58
12	STOPPER	S235JR
13	O-RING	NBR
14	DISC	MS 58
15	SPRING	DUBLEX
16	GASKET	KLINGRIT(NON ASBESTOS)
17	PLUG	RG5(CuSn5)

DN	D	K	A	dxn	H	L	L1	Weight (Kg)
20	105	78	14	14x4	197	88	205	3.2
25	115	85	14	14x4	197	88	205	3.6