




Weighted Sounding Valve(Fig.03.16)

Used for sounding the tanks on board. The body has a cock for venting air before opening.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+120°C
- Material Standard: TS EN 1982

PRODUCT SPECIFICATIONS

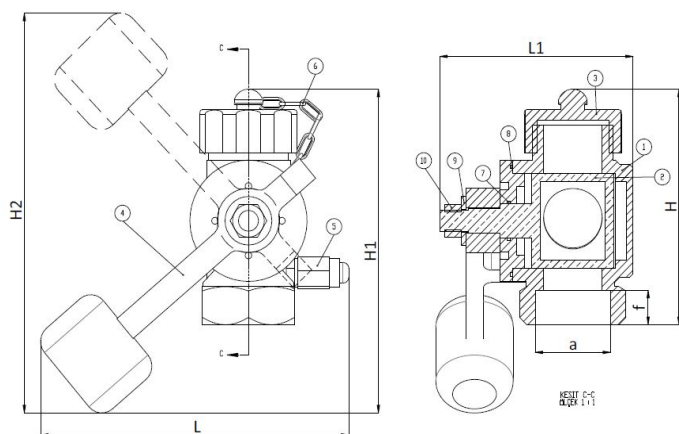

ITEM	Part Name	Material
1	MAIN BODY	RG5(CuSn5)
2	INNER BODY	RG5(CuSn5)
3	COVER	RG5(CuSn5)
4	HANDLE	GG 25
5	AIR RELIEF VALVE	MS 58
6	CHAIN	AISI 316 / AISI 304
7	ORING	NBR
8	ORING	NBR
9	WASHER	S355JR
10	NUT	S355JR

DN	H	H1	H2	L	L1	Weight (Kg)
40	168	200	260	130	210	4.80
50	178	210	250	150	210	7.00