



Swing Type Compact Check Valve(Fig.13.07)




Used as a non-return valve in hot and cold water systems and in superheated water, steam, superheated steam, compressed air, sea water and non-acidic, non-alkaline fluid lines.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+90°C
- Connection Standard: Design accordance with DIN 2501
- Dimension Standard: Special Design

PRODUCT SPECIFICATIONS

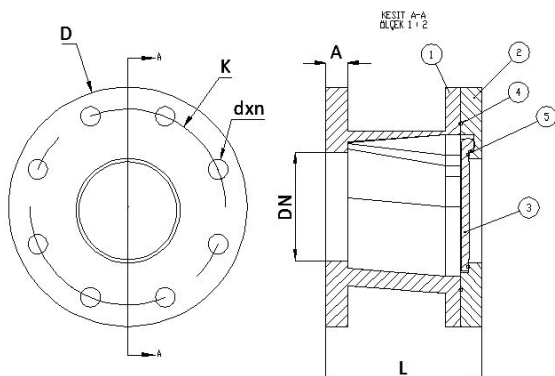

ITEM	Part Name	Material
1	BODY	GGG 40.3 / RG 10(CuSn10) / RG 5(CuSn5) / AISI 316
2	FLANGE	S235JR / RG 5(CuSn5) / RG 10(CuSn10)
3	DISC	RG 5(CuSn5) / RG 10(CuSn10) / AISI 316 / ALBRONZE
4	O-RING	NBR / VITON
5	O-RING	NBR / VITON

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300
D	95	105	115	140	150	165	185	200	220	250	285	340	405	460
K	65	75	85	100	110	125	145	160	180	210	240	295	355	410
A	14	16	16	16	16	16	18	20	20	22	22	26	29	32
dxn	14x4	14x4	14x4	18x4	18x4	18x4	18x4	18x8	18x8	18x8	22x8	22x12	26x12	26x12
L	65	70	70	75	80	85	105	125	145	170	200	250	310	360
Weight (Kg)	2.7	3.2	3.5	5.3	5.5	6.2	7.9	9.7	16	18	28	42	52	81