

Basket Type Fuel Filter(Fig.09.03)


Used in fuel lines to protect against contamination. Manufactured with a capacity to operate even when the basket is 85% full. The basket can also be manufactured from stainless steel sheet on request. Seamless drawn steel pipe is used for the body.

PRODUCT DETAILS

- Safe Operating Temperature: -10/+120°C
- Connection Standard: Design accordance with TS EN 1092-1 (DIN 2501)
- Dimension Standard: Design accordance with DIN 87151
- Working Pressure: PN 4

* Can be manufactured with PN 10 / PN 16 / JIS 5 K /JIS 10 K / ANSI 150 LB flange connections according to customer requirements.

PRODUCT SPECIFICATIONS

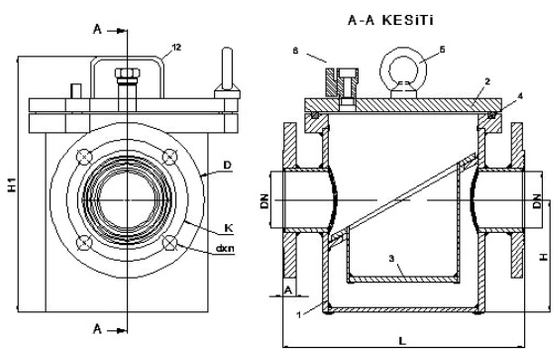

ITEM	Part Name	Material
1	BODY	S235JR
2	COVER	S235JR
3	FILTER	AISI 316 / AISI 304
4	O-RING	NBR
5	EYEBOLT	S235JR GALV. / AISI 316
6	BALL VALVE	MS58

DN	50	65	80	100	125	150	200	250	300
D	165	185	200	220	250	285	340	405	460
K	125	145	160	180	210	240	295	355	410
A	18	18	20	20	22	22	24	26	26
dxn	18x4	18x4	18x8	18x8	18x8	22x8	22x12	26x12	26x12
L	230	290	310	350	400	480	600	650	700
H	106	134	156	185	229	268	335	325	375
H1	300	330	380	400	455	510	610	635	710
Weight (Kg)	22.00	25.5	32.00	35.00	57.00	74.50	138.50	178.00	210.00