



L-Type Mud Box(Fig.08.04)



Used in pump lines to protect against contamination. Manufactured with a capacity to operate even when the basket is 85% full. The basket can also be manufactured from stainless steel sheet on request. Hot-dip galvanizing is applied to the materials against corrosion. Seamless drawn steel pipe is used for the body.


PRODUCT DETAILS

- Safe Operating Temperature: -10/+120°C
- Connection Standard: Design accordance with TS EN 1092-1 (DIN 2501)
- Dimension Standard: Design accordance with DIN 87151
- Working Pressure: PN 4

Can be manufactured with PN 6 / PN 10 / PN 16 / JIS 5 K / JIS 10 K / ANSI 150 LB flange connections according to customer requirements.

Custom sizes can be manufactured on request.

PRODUCT SPECIFICATIONS

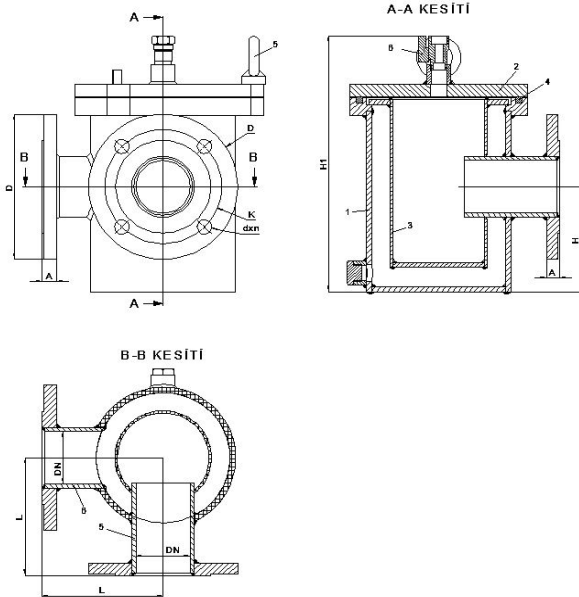

ITEM	Part Name	Material
1	BODY	S235JR / AISI 304 / AISI 316
2	COVER	S235JR / AISI 304 / AISI 316
3	FILTER	S235JR(GALV.) / AISI 304 / AISI 316
4	O-RING	NBR
5	EYEBOLT	S235JR GALV.
6	BALL VALVE	MS58

DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300
D	95	105	115	140	150	165	185	200	220	250	285	340	405	460
K	65	75	85	100	110	125	145	160	180	210	240	295	355	410
A	14	16	16	18	18	20	20	20	22	22	24	26	29	32
dxn	14x4	14x4	14x4	18x4	18x4	18x4	18x4	18x8	18x8	18x8	22x8	22x12	26x12	26x12
L	125	125	125	125	125	135	150	175	195	220	270	300	325	375
H	95	95	95	95	95	106	134	156	185	229	268	335	325	375
H1	280	280	280	280	280	300	330	380	400	455	510	610	635	710
Weight (Kg)	10	11	11	11.5	12	18	26	33	36	58	76	140	180	215