




Y-Type Strainer (Threaded)(Fig.03.29)

Hot and cold water systems, compressed air, saturated steam

PRODUCT DETAILS

- Operating Temperature: -10°C / +120°C PN 16-PN 40 / +200°C(PN13) / +250°C(PN11) / +300°C(PN10)
- Working Pressure: PN 40
- Dimension Standard: TS 11494
- Material Standard: TS 526 EN 1563

PRODUCT SPECIFICATIONS

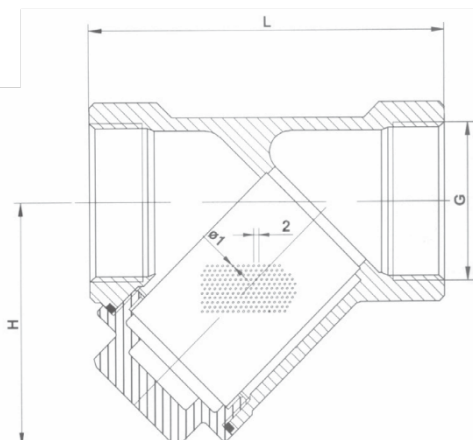

ITEM	Part Name	Material
1	BODY	S.S / GGG 40.3
2	BONNET	S.S / GGG 40.3
3	GASKET	PTFE / KLINGRIT(NON ASBESTOS)
4	FILTER	AISI 304

GGG 40.3

Nominal Pressure	DN	G	L	H	Weight (Kg)	Mesh
PN 16	15	½"	80	65	0.50	30 (600 MICRON)
	20	¾"	95	78	0.70	
	25	1"	100	88	1.00	
	32	1 ¼"	120	126	1.50	
	40	1 ½"	140	135	2.00	
	50	2"	180	145	2.80	

Stainless Steel

Nominal Pressure	DN	G	L	H	Weight (Kg)
PN 40	15	½"	65	51	0.23
	20	¾"	80	60	0.36
	25	1"	90	72	0.69
	32	1 ¼"	105	77	0.78
	40	1 ½"	120	87	1.22
	50	2"	140	103	1.79