



Sight Glass(Fig.13.01)




Generally used for monitoring liquid flows. Withstands pressures up to 7 bar and temperatures up to 300 °C. Can also be manufactured with other flange sizes on request. (JIS, NS)

PRODUCT DETAILS

- Safe Operating Temperature: -10/+240°C
- Connection Standard: Design accordance with TS EN 1092-1/1092-2
- Dimension Standard: Design accordance with TS EN 558 Series -1
- Flow Control: Flow can be checked through the sight glass.

PRODUCT SPECIFICATIONS

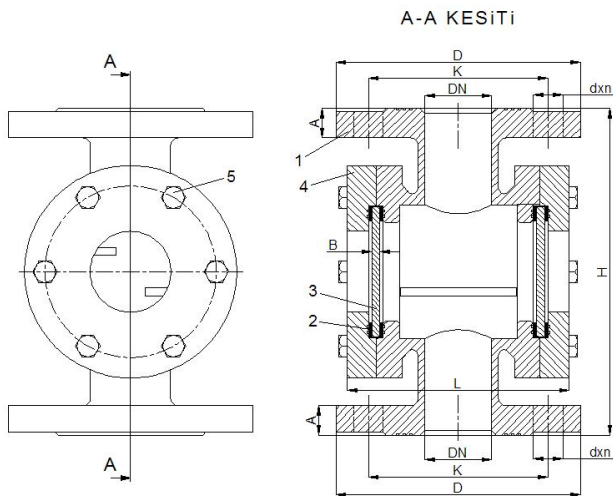

ITEM	Part Name	Material
1	BODY	GGG 40.3
2	GASKET	KLINGRIT(NON ASBESTOS)
3	GLASS	INSULATING GLASS
4	COVER	GGG 40.3
5	BOLT	S235JR

DN	15	20	25	32	40	50	65	80	100	125	150	200
D	95	105	115	140	150	165	185	200	220	250	285	340
K	65	75	85	100	110	125	145	160	180	210	240	295
A	14	16	16	18	18	20	20	20	22	22	24	26
dxn	14x4	14x4	14x4	18x4	18x4	18x4	18x4	18x8	18x8	18x8	22x8	22x12
B	8	8	8	8	8	8	10	12	12	12	12	12
L	118	118	133	143	143	153	165	196	234	254	289	340
H	160	160	160	200	200	230	270	290	310	330	410	420
Weight (Kg)	3.5	4.00	5.95	10.00	11.50	13.80	15.80	19.00	28.50	35.50	51.15	66.00